

## STANDARD PRESS SEALS

### STANDARD PRESS SEAL WITH GRADATED SUPER SEGMENT TECHNOLOGY

#### Features and technical data:

- completely gastight and watertight
- installation according to DIN 18533 in the relevant installation parts/flanges
- pipe seal can also be used as a blind insert
- for core drills/wall sleeve, diameter 100 – 300 mm
- super segment ring technology allows individual adjustment to the cable/pipe diameter on site
- particularly suitable for stock thanks to the wide application range
- segments with exact diameter indication and predefined breaking point
- U-profile press segments made of stainless steel V2A (AISI 304L) or V4A (AISI 316L)
- visual and tangible installation reliability due to built-in inspection opening
- seal width 40 mm
- rubber quality in EPDM or NBR



super segment ring technology with exact diameter marking



U-profile press segments made of stainless steel V2A (AISI 304L) or V4A (AISI 316L)



visual and tangible installation reliability due to built-in inspection opening



blind closed



split/can be subsequently split



sealing width 40 mm

Press seals for pipes

## STANDARD PRESS SEALS


HSD-SSG – STANDARD PRESS SEALS FOR ONE CARRIER PIPE						
Item	Article code	Packing unit	Article number	Core drill hole/wall sleeve ID (mm)	Suitable for carrier pipes OD (mm)	Figure
Standard press seal, graduated	<b>HSD 100-SSG-25-63 V2A/EPDM</b>	15	1650010010	100	25, 32, 40, 50, 63	
	<b>HSD 150-SSG-75-110 V2A/EPDM</b>	15	1650015020	150	75, 90, 110	
	<b>HSD 200-SSG-110-160 V2A/EPDM</b>	15	1650020020	200	110, 125, 135, 160	
Standard press seal, continuous	<b>HSD 100-SSG-18-65-SL V2A/EPDM</b>	15	1650010029	100	18 – 65	
	<b>HSD 150-SSG-70-112-SL V2A/EPDM</b>	15	1650015035	150	70 – 112	
	<b>HSD 200-SSG-110-162-SL V2A/EPDM</b>	15	1650020030	200	110 – 162	
	<b>HSD 250-SSG-159-211-SL V2A/EPDM</b>	4	1650025010	250*	159 – 211	
	<b>HSD 300-SSG-200-252-SL V2A/EPDM</b>	4	1650030010	300*	200 – 252	

SL = continuous

\* Blind cap available as an optional accessory.

Other types in V4A (AISI 316L) and NBR on request.

OPTIONAL ACCESSORIES – BLIND CAP					
Item	Article code	Packing unit	Article number	Suitable for use in press seals ID (mm)	Figure
Cap for HSD 250-SSG-159-211-SL	<b>HSD 250-SSG-D</b>	4	1650025090	160	
Cap for HSD 300-SSG-200-252-SL	<b>HSD 300-SSG-D</b>	4	1650030090	200	

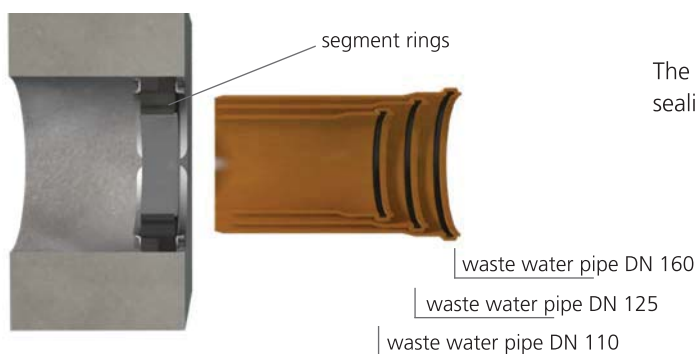

The universal press seal HSD 200-SSG-110-160 is suitable for sealing standard pipes with OD 110, 125 and 160 mm.